

# GIGALED TABLE LAMP

## MANUAL GUIDE

PLEASE READ ALL THE SAFETY INSTRUCTIONS BEFORE THE DEVICE OPERATION.  
KEEP THIS MANUAL GUIDE SAFE FOR FUTURE REFERENCE.

### PRODUCT INTRODUCTION:

The GIGALED Table lamp is used for the work area proper lighting. The device big head piece can be adjusted into different angles and directions. The head piece is provided with 4 stage luminance control and LED bulbs all in fastened in a practically adjustable arms for the for the work area proper lighting and maximum comfort.

### SPECIFICATION:


Input: AC100-240V, 50/60Hz, 0.6A  
Output: DC27.5V, 0.75A  
Power (W): 24W±10%  
Measure (mm): 1150\*85\*50mm  
Weight (g): 1826g  
Light source: LED bulb

### ACCESSORIES:

Holding Clamp (1pc)

### THE GIGALED TABLE LAMP PARTS:

- [ 01. ] Head piece.
- [ 02. ] Neck with fastening screw.
- [ 03. ] ON/OFF „I/O“ Switcher- and Luminance control (4 stage).
- [ 04. ] LED panel.
- [ 05. ] Arms.
- [ 06. ] Holding shaft.
- [ 07. ] Power supply.
- [ 08. ] Holding clamp.

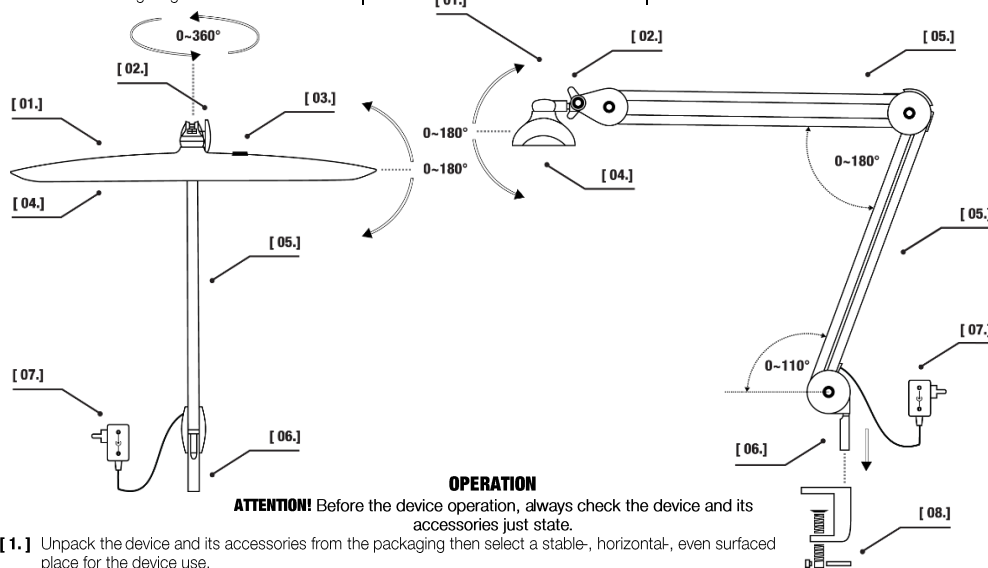

### OPERATION

**ATTENTION!** Before the device operation, always check the device and its accessories just state.

- [ 1. ] Unpack the device and its accessories from the packaging then select a stable-, horizontal-, even surfaced place for the device use.
- [ 2. ] Secure the [ 08. ] Holding clamp to the selected surface:
  - 1) Twist the [ 08. ] Holding clamp bottom fixing screw to a fully open state.
  - 2) The hole of the [ 08. ] Holding clamp has to be faced upwards.
  - 3) Place the [ 08. ] Holding clamp to the surface until it stops.
  - 4) Hold still the [ 08. ] Holding clamp, than fasten it to the surface with the bottom fixing screw till it stops.
    - **Attention!** Pay attention not to overdo the fastening, because it can cause damage to the [ 08. ] Holding clamp or to the surface.
    - The correctly secured [ 08. ] Holding clamp cannot be loose- or move on the surface.
    - The device can be applied into the correctly secured [ 08. ] Holding clamp [see at OPERATION [ 3. ]].
    - The [ 08. ] Holding clamp removal is happen in the reverse order. For more details see **CLEANING/MAINTENANCE** chapter **Holding Clamp**.
- [ 3. ] Hold steady the device than place its [ 06. ] Holding shaft to its full length into the [ 08. ] Holding clamp hole till it stops.
- [ 4. ] Adjust the device desired position with the [ 05. ] Arms and [ 01. ] Head piece. The [ 01. ] Head piece can be turned to up- and down and to sideways till 180° and it can be turned around 360° with its [ 02. ] Neck part [see at Pictures]. **Notice:** during in the first install it may occur that the plastic parts of the device are sill stiff e.g.: [ 01. ] Head piece [ 02. ] Neck with the plastic screw and the [ 05. ] Arms. **Attention!** Pay attention not to apply too much force or tension to them otherwise the device can be damaged.
- [ 5. ] Secure the head piece position with the fastening screw at the [ 02. ] Neck part. **Attention!** Pay attention not to apply too much force or tension during the fastening, otherwise the device can be damaged.
- [ 6. ] Connect the device [ 07. ] Power supply to the outlet.
- [ 7. ] For the device operation press the [ 03. ] ON/OFF „I/O“ switcher at the top of the device.

- [ 8. ] Adjust the desired luminance with the pressing of the [ 03. ] ON/OFF „I/O“ switcher at the top of the device. The device operates with 4 stage emitted luminance.
  - 100% (1. Step)
  - 75% (2. Step)
  - 50% (3. Step)
  - 25% (4. Step)
  - Switch Off (5. Step)
  - With a button 2short press, the device will turn off.

For switch between the luminance's press further the [ 03. ] ON/OFF „I/O“ switcher. If you overstep the desired luminance press further the switcher till the device is turn off [last 5<sup>th</sup> step]. After the turn down the luminance stages adjustment will starts from the beginning.

- [ 9. ] After the device use is finished turn it down and anneal it as following:
  - For the device switch off, press the [ 03. ] ON/OFF „I/O“ switcher at the top of the head piece and set it to the 5. Last step. The device will turn off without a sound indication.
  - After the device switch off pull out the [ 07. ] Power supply form the outlet.

### CLEANING/MAINTENANCE

**ATTENTION!** DO NOT dissemble the device! The device does not require inner cleaning/maintenance. Before the cleaning/maintenance always make sure the device turn off and annealed state [see at OPERATION [ 09. ]]. Always proceed with the cleaning/maintenance after the device full cool down! It is recommended to wear gloves during in the procedure.

Tools for the cleaning/maintenance: compressed air, soft brush and a non-synthetic clean, dry soft cloth.

**Device:** Remove the device from the [ 08. ] Holding Clamp. Hold stable the device, than pull out the device [ 06. ] Holding shaft from the [ 08. ] Holding Clamp with vertical linear movement. After the device is removed, place it to an even surfaced stable place [it is recommended to put a soft, dry cloth under the device]. Wipe out the device with a dry, soft cloth than clean it's hard to reach parts with brush and compressed air e.g.: switcher, joints [see at pics [ 01. ] – [ 07. ]]. Wipe out the device again with the dry, soft cloth. For the last step place back the device to its original position and check its correct operation (see at OPERATION [ 3 ] – [ 8. ] chapters).

**Holding Clamp:** Remove the device from the [ 08. ] Holding clamp [see at **CLEANING/MAINTENANCE** Device chapter], than remove the [ 08. ] Holding clamp from the surface. Hold still the [ 08. ] Holding clamp, than twist its bottom fixing screw to a fully open state, than remove the [ 08. ] Holding clamp from the surface. Wipe out the [ 08. ] Holding clamp external panel with a dry, soft cloth than clean it's hard to reach parts with brush and compressed air. Wipe out the external panel again with the dry, soft cloth than place back the [ 08. ] Holding clamp to the surface [see at OPERATION [ 2. ]]. For the last step place back the device to its original position and check its correct operation (see at OPERATION [ 3 ] – [ 8. ] chapters).

**Notice!** For tenacious contaminations, the device- and the [ 08. ] Holding Clamp external panel can be cleaned with lightly moist soft cloth, but pay attention that the device cannot have liquid inside in it or in its switcher, joints or to become contacted with the device [ 07. ] Power supply! At first place the cleaning material to the cloth, than start the surface cleaning. After the moist cleaning always wait for the device and its accessories full dry. After the moist cleaning do not put the device under it charge for at least for 1-2min! Do not use solvent detergents!

In case of average frequency use clean the device- and its accessories at least once a week according to the described above.

### STORAGE

Store the device and its accessories always in a dry place, far from radiant heat in a clean state. Wind the device [ 07. ] Power supply cord loosely together, pay attention not to break it.

Before the device operation always check the device and its accessories just state.

### SAFETY CAUTIONS

- [ 1. ] The device and its accessories are only for indoor use, between 0~40°C [32~104°F]
- [ 2. ] Before the device operation always make sure the device and its accessories just state.
- [ 3. ] The device cannot be left behind without supervision when it is turned on.
- [ 4. ] Use/store the device only in stable, even surfaced places. Do not put the device into places where it can be knocked down or may fall off.
- [ 5. ] The device or its accessories cannot become contact with liquids.
- [ 6. ] Do not ever touch the device- or its accessories with wet/moist hands.
- [ 7. ] Do not ever operate the device if any parts of it damaged or had any kind of accident or fell into water! Take the device into the place of purchase for repair and seek for professional help.
- [ 8. ] Only authorized personals can repair the device- or its accessories.
- [ 9. ] Use/store the device in a dry place far from radiant heat, in a clean environment. Avoid moist/wet and contaminated places.
- [ 10. ] Do not look directly into the device light source during in operation.
- [ 11. ] The device may have electric charges in it even if its turned off. After the device use is finished, always turn it down and anneal it [see at OPERATION [ 09. ] chapter].

For more information about the device, visit our website: <http://www.crystalhalls.com> or look for the place of purchase.

### NOTICE!

If any case of malfunction was found or any parts of the device has to be replaced/repared, please look for the place of purchase.

Elite Cosmetix LTD.; Jozsef Krt. 44., H-1085 Budapest, Hungary

[ EN ] GIGALED TABLE LAMP [ HU ] GIGALED ASZTALI LÁMPA [ RO ] LAMPĂ DE MASĂ GIGALED [ DE ] GIGALED TISCHLAMPE [ FR ] LAMPE DE TABLE GIGALED [ IT ] LAMPADA DA TAVOLO GIGALED [ ES ] LAMPARA DE MESA GIGALED